



PCM 滤波曲线



矩声®

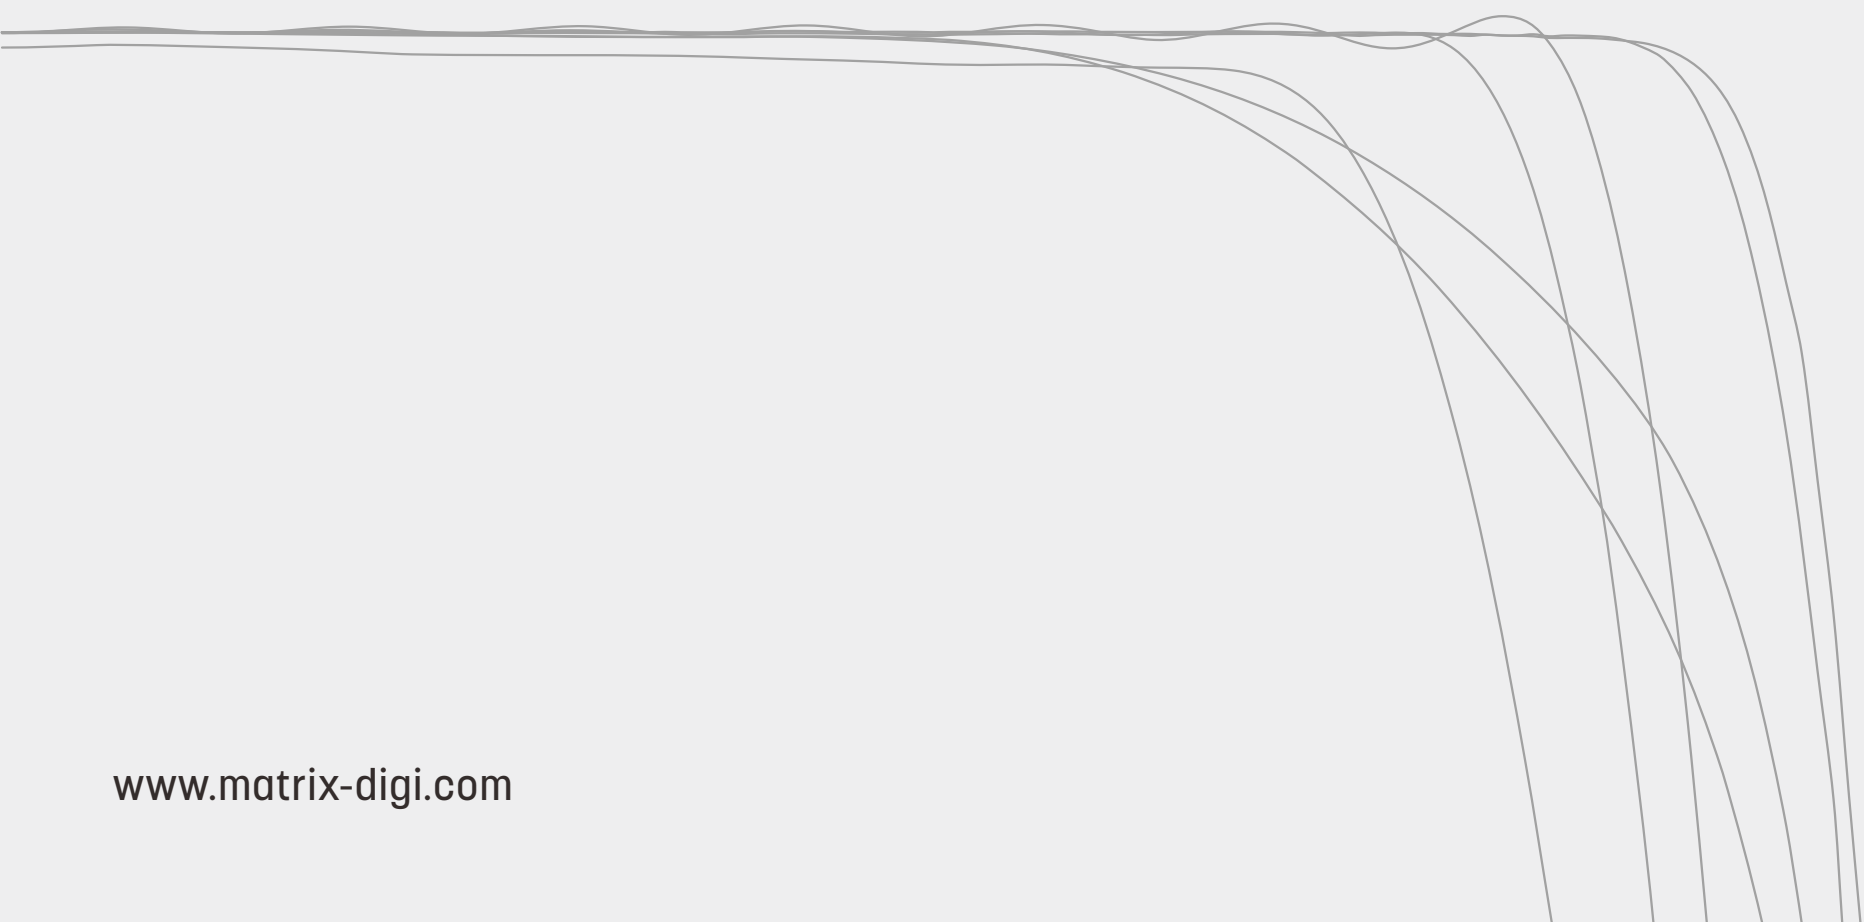

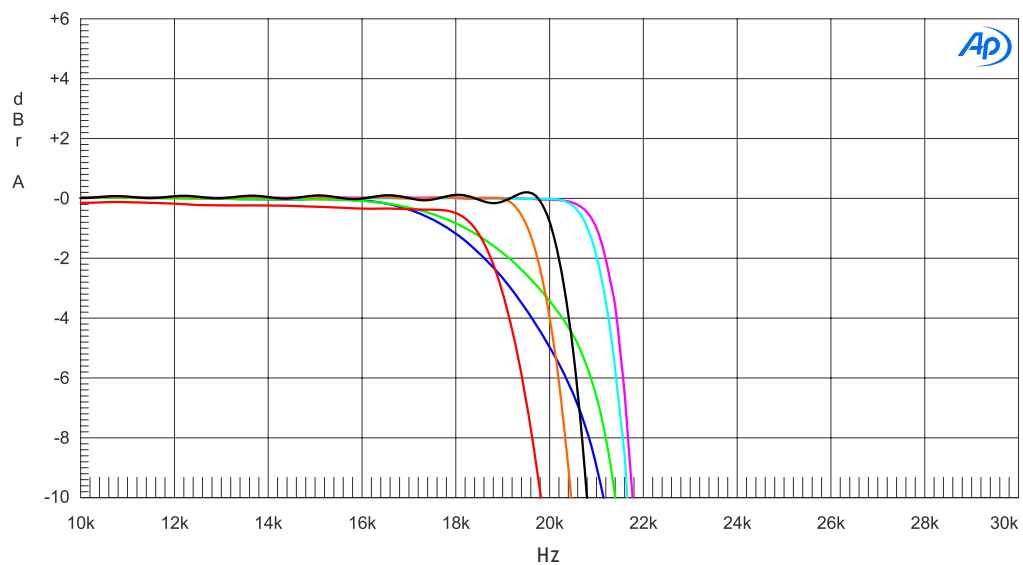

Sweep	Trace	Color	Line Style	Thick	Data	Axis	Comment
1	1	—	Solid	1	DSP Anlr.Level A	Left	mod1_fast roll-off,minimum
2	1	—	Solid	1	DSP Anlr.Level A	Left	mod2_slow roll-off,minimum
3	1	—	Solid	1	DSP Anlr.Level A	Left	mod3_fast roll-off,linear
4	1	—	Solid	1	DSP Anlr.Level A	Left	mod4_slow roll-off,linear
5	1	—	Solid	1	DSP Anlr.Level A	Left	mod5_brickwall
6	1	—	Solid	1	DSP Anlr.Level A	Left	mod6_hybrid
7	1	—	Solid	1	DSP Anlr.Level A	Left	mod7_apodizing

(在 44.1kHz 时测试)

适用机型：

element X2
 element M2
 element i2
 element X
 element P
 element M
 element i
 X-SABRE 3
 X-SABRE Pro (MQA)
 X-SABRE Pro
 mini-i 3 Pro
 mini-i 3
 mini-i Pro 2s

HIGH PERFORMANCE AUDIO

www.matrix-digi.com

西安矩阵电子科技有限公司
029-86211122
中国·西安经济技术开发区凤城五路111号
恒石国际中心B座8楼801室